


Schemi elettrici Wiring diagrams Schema électrique Schaltpläne Esquemas eléctricos

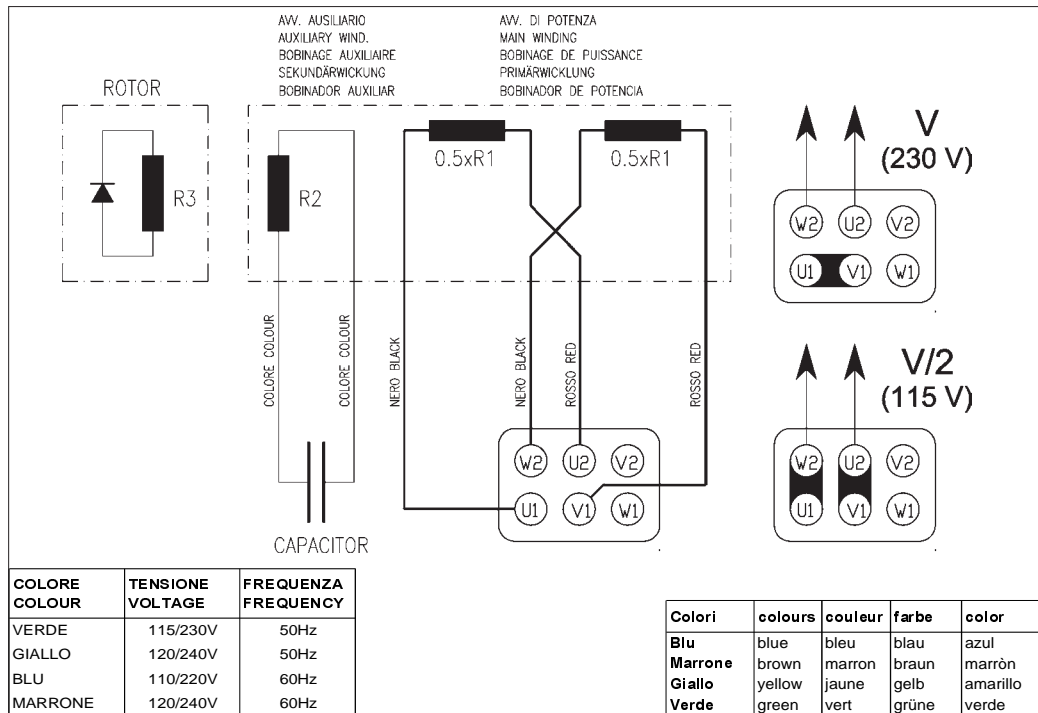

Caratteristiche elettriche - Electrical data - Elektrische eigenschaften - Caracteristiques electriques - Características eléctricas

Tipo Type Type Type Tipo	50Hz - 115-230V					120/240V		60Hz - 120/240V															
	Resistenza degli avvolgimenti (20°C) Winding resistances (20°C) Résistances des bobinages (20°C) Widerstand der Wicklung (20°C) Resistencias de los bobinados (20°C)																						
	Potenza Power Puissance Leistung Potencia	Statore Stator Estator	Ausiliario Auxiliary Excitation	Rotore Rotor Rotor	Condensat. Capacitor Condensat. Kondensat. Condensat.	Condensat. Capacitor Condensat. Kondensat. Condensat.	Potenza Power Puissance Leistung Potencia	Statore Stator Estator	Ausiliario Auxiliary Excitation	Rotore Rotor Rotor	Condensat. Capacitor Condensat. Kondensat. Condensat.												
	kVA	(R1) Ω	(R2) Ω	(R3) Ω	(450V) μF (*)	(450V) μF (*)	kVA	(R1) Ω	(R2) Ω	(R3) Ω	(450V) μF (*)												
1500 rpm												1800 rpm											
GK4SAL	KS 140 S M4 B	5	1.10	2.50	1.8	45	50	6.2	0.80	1.80	1.8	45											
GK4SBL	KS 140 S M4 C	6.5	0.77	1.90	2.0	45	50	8.1	0.55	1.50	2.0	45											
GK4MAL	KS 140 M M4 A	8	0.45	1.20	2.4	31.5 + 31.5	30 + 40	10	0.35	1.00	2.4	30 + 36											
GK4MBL	KS 140 M M4 B	10	0.32	1.00	2.6	40 + 45	45 + 50	12.5	0.29	0.75	2.6	40 + 45											
	KS 140 L M4 A	13.5	0.22	0.64	3.4	2x30 + 40	3x40	16.9	0.19	0.43	3.4	30 + 2x40											
	KS 140 L M4 B	16	0.18	0.42	3.9	2x40 + 50	3x50	20	0.15	0.36	3.9	40 + 2x50											
	KS 140 XL M4	18.5	0.14	0.35	5.6	3x30 + 40	30 + 3x40	25	0.12	0.30	5.6	3x30 + 40											
3000 rpm												3600 rpm											
GK2SAL	KS 140 S M2 A	8.5	0.54	1.20	0.9	2x25	2x30	10.5	0.55	1.20	0.9	2x25											
GK2SBL	KS 140 S M2 B	11	0.32	0.94	1.1	30 + 40	2x40	13.5	0.26	0.72	1.1	2x40											
GK2MAL	KS 140 M M2 A	15	0.23	0.51	1.2	40 + 50	45 + 50	18.5	0.15	0.37	1.2	45 + 50											
GK2MBL	KS 140 M M2 B	17.5	0.18	0.41	1.3	2x40 + 30	3x40	22	0.22	0.43	1.3	3x40											
	KS 140 L M2 A	20	0.13	0.32	1.5	3x40	2x40 + 50	25	0.11	0.26	1.5	3x40											
	KS 140 L M2 B	25	0.09	0.23	1.7	4x40	4x45	31	0.06	0.22	1.7	40 + 2x45											

(*) Valori indicativi - indicative values - Valeurs indicatives - Indikative Werte - Valores indicativos